


Fehr Eyebolts are marked for traceability, drop forged for strength and hot dip galvanized for durability, resistance to corrosives and weather. They are assembled with hex nuts tapped oversize. These bolts should not be used for angular loads. UNC threading.

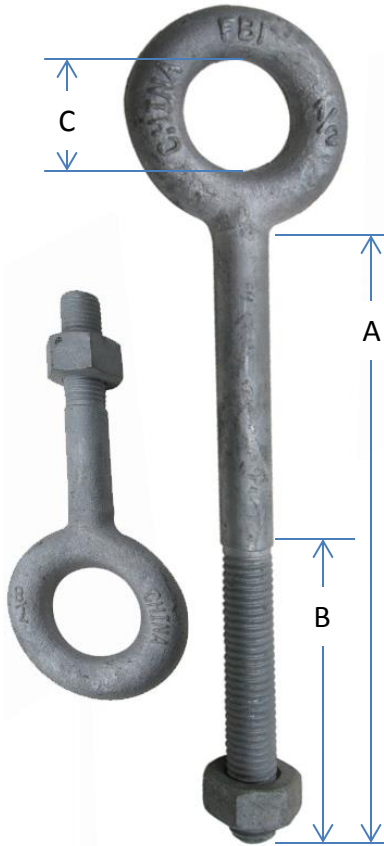

Fehr Part #	Size (in)	Working Load Limit (lbs)	Wt (lbs)/Ea	A Shank Length (in)	B Min. Thread Length (in)	C Eye Diameter (in)
EB250X02	1/4 X 2	650	0.07	2.00	1.00	0.50
EB250X04	1/4 X 4	650	0.10	4.00	2.00	0.50
EB312X02	5/16 X 2	1,200	0.13	2.00	1.00	0.63
EB312X04	5/16 X 4-1/4	1,200	0.15	4.25	2.00	0.63
EB372X02	3/8 X 2-1/2	1,550	0.20	2.50	1.25	0.75
EB375X04	3/8 X 4-1/2	1,550	0.25	4.50	2.25	0.75
EB375X06	3/8 X 6	1,550	0.30	6.00	3.00	0.75
EB500X03	1/2 X 3-1/4	2,600	0.50	3.25	1.50	1.00
EB500X06	1/2 X 6	2,600	0.60	6.00	3.00	1.00
EB500X08	1/2 X 8	2,600	0.76	8.00	4.00	1.00
EB500X10	1/2 X 10	2,600	0.88	10.00	5.00	1.00
EB500X12	1/2 X 12	2,600	0.94	12.00	6.00	1.00
EB500X18	1/2 X 18	2,600	1.25	18.00	9.00	1.00
EB625X04	5/8 X 4	4,750	0.95	4.00	2.00	1.25
EB625X06	5/8 X 6	4,750	1.09	6.00	3.00	1.25
EB625X08	5/8 X 8	4,750	1.20	8.00	4.00	1.25
EB625X10	5/8 X 10	4,750	1.40	10.00	5.00	1.25
EB625X12	5/8 X 12	4,750	1.55	12.00	6.00	1.25
EB625X15	5/8 X 15	4,750	1.68	15.00	7.50	1.25
EB625X18	5/8 X 18	4,750	2.00	18.00	9.00	1.25
EB625X21	5/8 X 21	4,750	2.35	21.00	10.50	1.25
EB625X24	5/8 X 24	4,750	2.45	24.00	12.00	1.25
EB750X04	3/4 X 4-1/2	6,450	1.40	4.50	2.25	1.50
EB750X06	3/4 X 6	6,450	1.75	6.00	3.00	1.50
EB750X08	3/4 X 8	6,450	2.00	8.00	4.00	1.50
EB750X10	3/4 X 10	6,450	2.20	10.00	5.00	1.50
EB750X12	3/4 X 12	6,450	2.30	12.00	6.00	1.50
EB875X05	7/8 X 5	9,500	2.58	5.00	2.50	1.75
EB875X08	7/8 X 8	9,500	2.75	8.00	4.00	1.75
EB875X10	7/8 X 10	9,500	3.18	10.00	5.00	1.75
EB875X12	7/8 X 12	9,500	3.60	12.00	6.00	1.75

- Never exceed Working Load Limit.
- WLL applies to straight line loading only.
- Inspect eyebolts prior to use.
- Replace eyebolts if bent, worn or nicked.
- Not for use on angular lifts.

Hot Galvanized Eyebolt Washers

Fehr Part #	O.D.	I.D.	Thickness	Wt (lbs)/Ea
WASHER500	1.39"	.55"	.097"	.034"
WASHER625	1.78"	.70"	.140"	.080"



Also Available:

